



<b>SPECIFICATION:</b>		4P*26AWG(7/0.16mm)+Al.Foil+PVC Jacket, OD: 5.3±0.3mm	
<b>ITEM</b>		<b>SPECIFICATION</b>	
CONDUCTOR	AWG	26AWG	
	MATERIAL	Bare Copper	
	COND SIZE	7/0.16±0.01mm	
INSULATION	Min.AVG.THICK	0.15mm	
	MATERIAL	HD-PE	
	COLOUR	Blue-White/Blue, Orange-White/Orange, Green-White/Green,Brown-White/Brown	
	O.D	0.85±0.02mm	
Al.Foil	SIZE	0.035 x 16mm	
BRAID	SIZE	16 x 3 x 1/0.12	
JACKET	MIN.AVG.THICK	0.40mm	
	MATERIAL	PVC	
	COLOUR	ASSORTED UPON REQUEST	
	OD	5.3±0.30mm	

Signature	Revision History	Date	Rev.
Norman Xu	For Bulk Production	Aug.23.2007	01


Patchcable

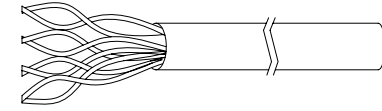

**CONSTRUCTION D.W.G**

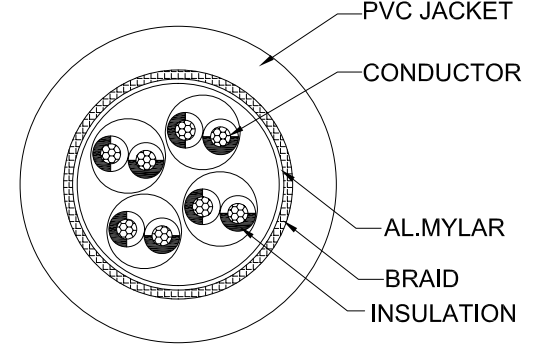

Packing Sketch

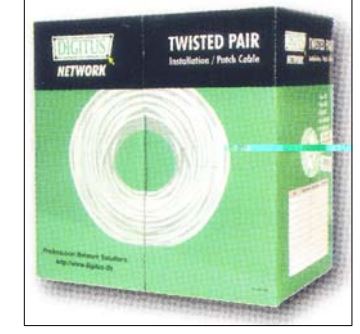

RoHS Compliant

G	<b>ELECTRICAL CHARACTERISTICS</b>	<b>PHYSICAL PROPERTIES</b>					
	1.Rating: TEMP 60 ° C. 2.Conductor Resistance: AT 20 ° C Max. 26AWG: 148.94 Ohm/km 3. Attenuation(normal): at 1MHz 27.9 dB/km; at 10MHz 91.9dB/km 4. Capacitance(normal): 65.6pf/m 5. Cross talk: at 1MHz 62dB at 10MHz 47dB						
H				<b>ASSMANN</b>	CAT5E SFTP PATCH CABLE		
				Electronic GmbH	Scale	N/A	Sheet
			ST81417	Unit	MM	1/1	