
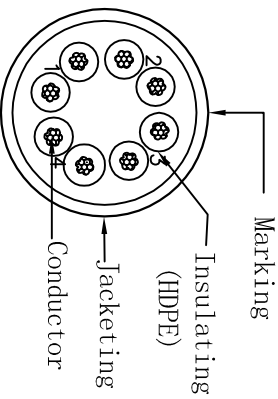
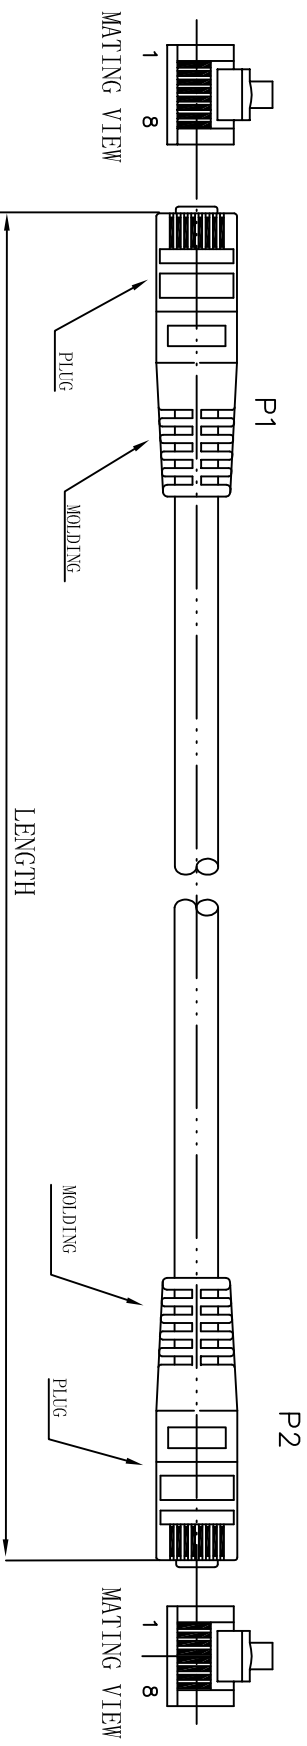


DATE	REV	DESCRIPTION	BY	CHKD




orange 1	green 2
white/orange	white/green
blue 3	brown 4
white/blue	white/brown

Conductor	Bare Copper 26AWG 70/152±0.005mm
Insulation	Thickness: MIN at any point: 0.20mm MAX AVG: 0.25mm Diameter: 0.85±0.05mm
Jacketing PVC	Thickness: MIN at any point: 0.70mm MAX AVG: 0.80mm Diameter: 5.2±0.2mm

WIRE	CAT.6 UTP STR 26AWG*4P
PLUG	YUS-06 8P8C 3U*
Length	XXM
COLOR	XX

RoHS Compliant

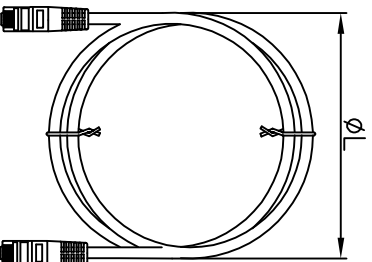

P A/R	PINOUT		
	P1(T568B)	WIRE	P2(T568B)
1	1	WHT/ORG	1
2	2	ORG	2
3	3	WHT/GRN	3
4	4	GRN	6
5	5	BLU	4
6	6	WHT/BLU	5
7	7	WHT/BRN	7
8	8	BRN	8

ASSMANN Electronic GmbH

Unless specified on the drawing, tolerances are per the follows:
 .X ± 1
 .XX ± 0.2
 .XXX ± 0.05

DRAW. NO	YUS-06	ITEM	DK-1611-xx	
DEPARTMENT		DRAW	WZY	DRAW 2007/08/03
SCALE		CHECKER		DRAW
UNIT	mm	APPROVAL		DRAW

3RD

